



# THE POWER OF JOHNSTONE™

WE MAKE IT EASIER FOR CONTRACTORS TO DO BUSINESS

PRICES VALID NOVEMBER 1-30, 2024

**1734<sup>99</sup>**

**H86-210**  
Mfg. #CAT85K2

## Combustion Analyzer Kit

Designed for efficient O<sub>2</sub>, CO, CO<sub>2</sub>, draft pressure, and temperature combustion analysis

Equipped with HydroCycle™ Pump technology

Built in Manometer



**NEW!**

**34<sup>99</sup>**

**L51-909**  
Mfg. #TH1110U4000/U


## FocusPRO® Non-Programmable Thermostat

Supports 1H/1C conventional systems

UWP® wall plate

Large, bright digital display

Filter change reminder



**Honeywell Home**  
by **resideo**

**159<sup>99</sup>**

**S89-287**  
Mfg. #5470

## RESCUE® Direct Drive Blower Motor

48 frame, 1075 RPM

Ball bearing, all-angle mounting

Diam.: 5-5/8"

HP: 3/4-1/5

Volts: 115




**24<sup>99</sup>**

**L45-006**  
Mfg. #NS2-0000-03

## Universal Air Switch

Replaces hundreds of small footprint air switches

5 separate springs cover ranges from .10" W.C. to 10" W.C.



**ESP**  
ENERGY SAVING PRODUCTS



# ARE YOU READY FOR THE A2L TRANSITION?

JOHNSTONE SUPPLY HAS THE REFRIGERANTS YOU NEED ON YOUR TRUCK

See Inside How You Can Get a Free A2L Hose



# IT'S TIME TO MAKE THE SWITCH TO A2L REFRIGERANTS

During November,  
**BUY A CYLINDER**  
of R-32 or R-454B


Receive a FREE\*  
**A2L CHARGING HOSE**  
with left-handed connector



B64-386

Higher Discharge  
Temperatures

No glide

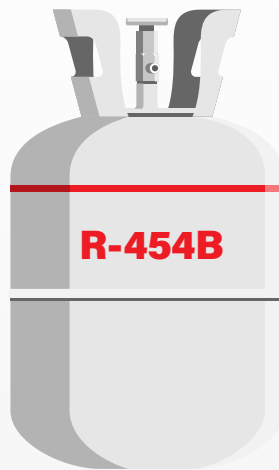

B66-856

Lower Discharge  
Temperatures

Little to no glide

**A2L Refrigerants will become the new standard  
in HVAC Systems manufactured starting on**


**January 1, 2025**

R-32 and R-454B meet the 700 GWP  
(Global Warming Potential) limit for the  
stationary residential and light commercial  
air conditioning and heat pumps sector.

**TECH TIP**

**Use only the refrigerant that the equipment  
is designed for. Never mix refrigerants.**

## Johnstone and A-Gas Can Help With Your Reclaimed Refrigerants

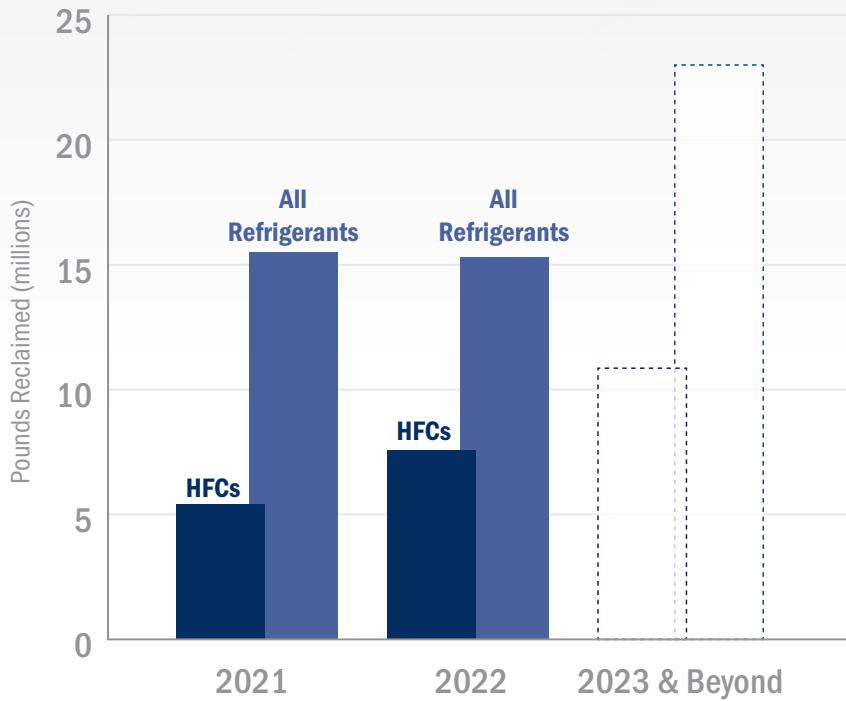

Information from Refrigerant Reclamation Summary 2000-2022 U.S. Environmental Protection Agency (1/28/2023)

The EPA estimates there are **300M lbs. of refrigerants in the US market**, yet the reclaim numbers are dramatically lower.

**As indicated in EPA 608 certification test, venting is prohibited.** Recovery allows the product to be reprocessed into AHRI-certified products that can be reintroduced into the market for future equipment service.

**Learn more about reclaim options at your local Johnstone Supply.**


**A-GAS**  
TOGETHER WE CAN  
EPA Certified Reclaimer

## Johnstone is Your A2L Transition Resource

*Will I need new tools?*  
*Where can I get training?*  
*How does this affect equipment?*

Got questions, go to

**JohnstoneSupply.com/A2L**

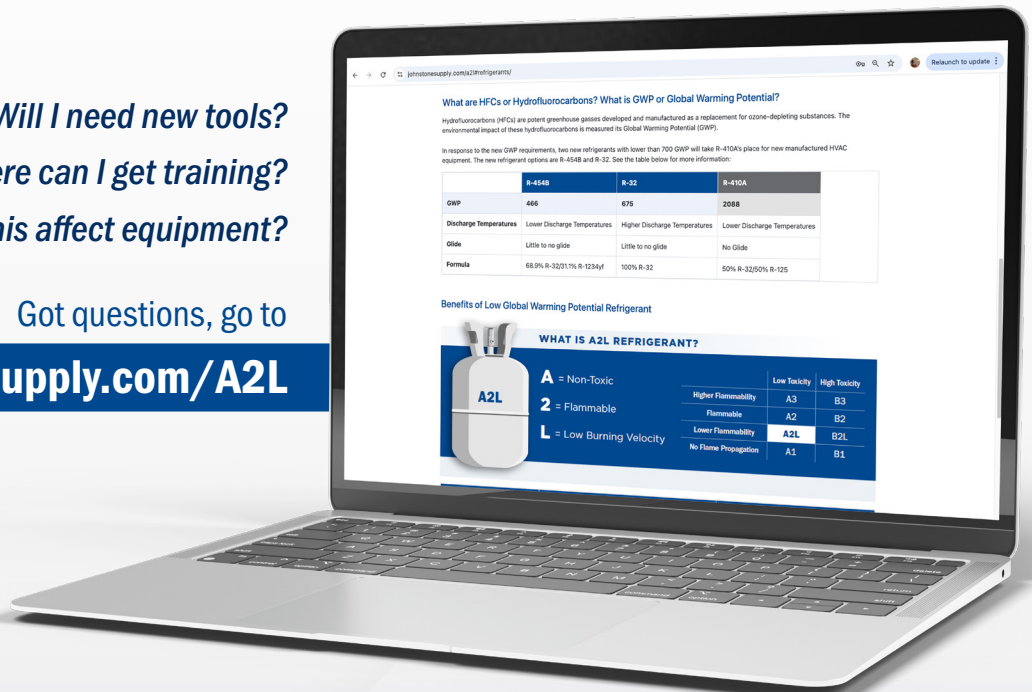



HEATING AND  
AIR CONDITIONING

# Commercial Packaged Rooftop Units

Point Choice



Small Apex



Point Pro



Point Core



## Greater Control for Better Efficiency



- 3-20 ton capacity range
- Field convertible duct connections
- On-site flexibility with less inventory
- AC and packaged heat pump models
- Simplified installation and energy-efficient

**849<sup>99</sup>**

**B85-854**  
Mfg. #800

### Steam Humidifier

Electrode technology —  
proven more effective  
to generate steam;  
requires no cleaning

5-year warranty  
Volts: 120

Output: 11.5 GPD @ 120V;  
20.5 GPD @ 208V; 23.3  
or 34.6 GPD @ 240V



AprilAire

## TECH TIP

### Maintain Optimal Performance in Your Humidifier

Replace  
Canister  
**Every  
Season**  
**79<sup>99</sup>**  
B17-804



Replace  
Electrode Wires  
**Every  
3 Years**  
**19<sup>99</sup>**  
B22-845

Replace O-rings  
and Gaskets  
**As  
Needed**





HEATING AND  
AIR CONDITIONING

# QUALITY YOU CAN COUNT ON

EXCLUSIVELY AT JOHNSTONE SUPPLY



## XH4 Series, 14.3 SEER2 Heat Pumps

Single-Phase, 2 to 5 Ton, R-454B

**2025 Ready with R-454B**

### Features

- Field-installed filter-drier and factory charge for a 15ft lineset
- Swing-out control panels and removeable fan guard for convenient access to components

Order #	Mfg. #	Tonnage	BtuH Cooling	BtuH Heating Input	HSPF2
B68-208	XH424E2S11	2	23,600	22,800	7.8
B68-209	XH436E2S11	3	34,000	32,000	7.8
B68-210	XH448E2S11	4	47,000	47,000	7.8
B68-211	XH460E2S11	5	55,500	56,500	7.8

## Z8ES Series, 80% AFUE Furnaces

Single-Stage, Multi-Position, ECM motor

**Compatible with R-454B Outdoor Units**

Order #	Mfg. #	BtuH Cooling	BtuH Heating Input	Width
L61-860	Z8ES040A12SMPS1	40,000	32,000	14-1/2"
L61-861	Z8ES060A12SMPS1	60,000	48,000	14-1/2"
L61-862	Z8ES080B12SMPS1	80,000	64,000	17-1/2"
L61-863	Z8ES080C16SMPS1	80,000	64,000	21"
L61-865	Z8ES100B12SMPS1	100,000	80,000	17-1/2"
L61-866	Z8ES100C16SMPS1	100,000	80,000	21"
L61-867	Z8ES100C20SMPS1	100,000	80,000	21"
L61-869	Z8ES120C20SMPS1	120,000	96,000	21"



**389<sup>99</sup>****S83-273**  
Mfg. #5860**RESCUE EZ16®  
Blower Motor**Universal ECM replacement  
for furnaces and air handlers

Diam.: 5-5/8"

HP: 1-1/3

Volts: 115/208-230

**249<sup>99</sup>****S83-698**  
Mfg. #6203X**Evergreen® EM Dual  
Voltage ECM Direct  
Drive Blower Motor**

48 frame, belly band mount

Diam.: 5-5/8"

HP: 1/3

Volts: 208-230/115



genteq

**249<sup>99</sup>****S83-128**  
Mfg. #6633**RESCUE SELECT  
Pro™ Blower Motor**Programmable ECM  
replacement for furnaces  
and air handlers

Diam.: 5-5/8"

HP: 1/2-1/3

Volts: 115/208-230

**NEW!****139<sup>99</sup>****S83-821**  
Mfg. #6303S**Evergreen® ECM  
Outdoor Condenser  
Fan Motor**

80% efficient


Diam.: 5-5/8"

HP: 1/3

Volts: 208-230




genteq

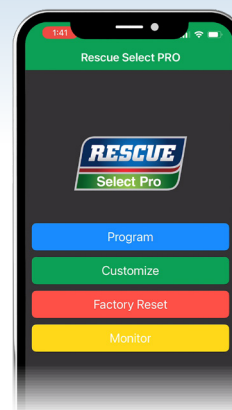**Did You Know?****Matching OEM profiles when replacing  
ECM motors ensures top performance  
and reliability.**RESCUE SELECT Pro™ has integrated Bluetooth® technology that  
unlocks advanced features – like OEM direct programming,  
customized airflow in operation, and real-time diagnostics.Available on the  
App StoreGET IT ON  
Google Play**11<sup>99</sup>****G22-336**  
Mfg. #PF42440**Control Transformer**

120/208-240 Primary Voltage

24 Secondary Voltage

Class 2 rated, easily  
mounts for use on low  
voltage control circuitsDesigned for over 60,000  
hours of continuous use

Packard

**19<sup>99</sup>****S58-703**  
Mfg. #FM55**Torsion Type  
Flexible Mount**Designed for direct  
drive blower motors

Mounting centers: 9" or 10"

Motor Diam.: 5.5"



FASCO



# PRESS & PUSH FITTINGS

The Alternative to Brazing, for Faster, Safer, Leak-free Connections

## WHY USE BRAZE-FREE FITTINGS?



### Time and Labor Savings

Press and push fittings can result in up to 50% labor savings



### Safe Jobsite

Leave the torch and avoid potential safety hazards associated with brazing – a great solution for A2L refrigerants



### Full Range of Applications

Works for any job with refrigerant lines up to 1-3/8" – water and gas fittings also available

### Easier Equipment Installation

Connect refrigerant piping quickly with the press-to-connect tool.

### High Quality

One-piece fittings are reliable and minimize potential for leaks.

### Refrigerant Press Fittings

Press fittings handle pressures 700 PSI or higher.

### Easy Installation

Save time and effort with fast, flame-free connections - reliable joints with a push.

### No More Mess

Connecting piping quickly without a flame creates a cleaner job with a better looking finish.

### Push-to-Connect Technology

"Handle the pressure"  
Rated up to 700 PSI.



For more information and installation videos, visit [JohnstoneSupply.com/brazefree](http://JohnstoneSupply.com/brazefree)

P  
R  
E  
S  
S

P  
U  
S  
H

# ONLINE POWER DEALS

November 1, 2024 – November 30, 2024  
While supplies last. Price available online only.

## Cobra® Pliers



**29<sup>99</sup>**

**H25-787**  
Mfg. #8701250SBA



## RESCUE® Direct Drive Blower Motor



**119<sup>99</sup>**

**S89-094**  
Mfg. #5461



**16<sup>99</sup>**

**L38-693**  
Mfg. #SIG101

### Hot Surface Ignitor

10" lead length  
120 VAC  
Designed to reach ignition  
temperature within 17 seconds  
18-gauge nickel  
chrome lead wires  
Includes mounting adapter



**8<sup>99</sup>**

**R88-121**  
Mfg. #G012SS101118

### Stainless Steel Gas Appliance Connector

1/2" MIP Tapped  
3/8" FIP x 1/2" FIP



Order #	Mfg. #	Min. BtuH Capacity	O.D.	Length	Price
R88-121	G012SS101118	164,200	5/8"	18"	<b>8.99</b>
R88-122	G012SS101124	150,000	5/8"	24"	<b>9.99</b>
R88-123	G012SS101136	125,000	5/8"	36"	<b>11.99</b>

**11<sup>99</sup>**

**B11-556**  
Mfg. #RC0410

### Solid State 3 N' 1 Relays

Combination relay, overload  
and start capacitor



Order #	Mfg. #	HP	Price
B11-556	RC0410	1/4, 1/3	<b>11.99</b>
B13-542	RC0210	1/2	<b>14.99</b>

**149<sup>99</sup>**

**B79-210**  
Mfg. #QSWI3000

### Quick-Sling Unit Heater Swivel Mount

Allows for 360° unit rotation  
14-gauge steel  
Directs flow of heat for  
maximum efficiency  
Includes all necessary hardware  
Unit heater not included



## Have What You Need, When You Need It

Streamline your HVACR installations with a smart,  
data-driven inventory solution.



Replenish Your Inventory



One Touch Shopping



Lower Job Costs



Easy Review & Approval

Want to Learn More?

Ask your Johnstone Sales  
Representative about PartStock



# TIME-TESTED PERFORMANCE FROM A NAME YOU CAN TRUST



## GLZS4 Series, 14.3 SEER2 Heat Pumps

Single-Phase, 1-1/2 to 5 Ton, R-32

**2025 Ready with R-32**

Order #	Mfg. #	Nom. Tons	BtuH Cooling	BtuH Heating	HSPF2
<b>Multi-Family</b>					
B68-928	GLZS4MA1810	1-1/2	18,000	18,000	7.8
B68-929	GLZS4MA2410	2	24,000	24,000	7.8
B68-930	GLZS4MA3010	2-1/2	30,000	30,000	7.8
B68-931	GLZS4MA3610	3	36,000	36,000	7.5
<b>Standard</b>					
B68-932	GLZS4BA1810	1-1/2	18,000	18,000	7.8
B68-933	GLZS4BA2410	2	24,000	24,000	7.8
B68-934	GLZS4BA3010	2-1/2	30,000	30,000	7.8
B68-935	GLZS4BA3610	3	36,000	36,000	7.5
B68-936	GLZS4BA4210	3-1/2	42,000	42,000	7.8
B68-937	GLZS4BA4810	4	48,000	48,000	7.8
B68-938	GLZS4BA6010	5	60,000	60,000	8.2

## Retrofit Furnace Kit for R-32 Outdoor Units and Indoor Units



**X72-361**  
Mfg #0230K00044

Furnace Integration Kit (X72-361) can be used to match a current non-communicating R410A furnace with a new R-32 outdoor unit and indoor coil.

The Furnace Integration Kit for R-32 Systems provides the mitigation protocol when a leak is detected in the R-32 coil equipped with R-32 leak detection sensors.

For installation details, refer to the kit's installation and operation manuals.

# BUY (1) M12™ FORCE LOGIC™ PRESS TOOL KIT

**1699<sup>99</sup>**

**H28-530** | Mfg. 2473-20  
M12™ FORCE LOGIC™ Press Tool Kit

**M12**



# PLUS, BUY (1) M12™ PRESS JAW KIT



**2049<sup>99</sup>**

**H29-053** | Mfg. #49-16-2462Z  
1/4" - 1-1/8" ZoomLock® MAX Press Jaw Kit  
for M12™ FORCE LOGIC™ Press Tools

OR



**1849<sup>99</sup>**

**H29-054** | Mfg. #49-16-2461M  
1/4" - 7/8" Streamline® ACR Press Jaw Kit  
for M12™ FORCE LOGIC™ Press Tools

# GET A FREE PACKOUT STACK VIA E-REBATE

48-22-8397R  
PACKOUT™ 36oz  
Insulated Bottle with  
Chug Lid

48-22-8432  
PACKOUT™ Deep  
Organizer

48-22-8442  
PACKOUT™  
2-Drawer Tool Box

48-22-8427  
PACKOUT™  
Rolling Tool Box

**PACKOUT™**  
MODULAR STORAGE SYSTEM

**MOST VERSATILE  
MODULAR STORAGE SYSTEM**



**SCAN TO  
REDEEM**

**\$430  
VALUE**

milwaukeeetool.com/E-Rebates/Johnstone

**2699<sup>99</sup>**

**H86-132**  
Mfg. #2922-20

## M18™ FORCE LOGIC™ Press Tool

Compact and lightweight  
inline design

Auto-cycle ensures  
full press every time

Longest calibration  
interval at 50,000 cycles

Includes battery,  
12V/18V multi-voltage  
charger and carrying case

Jaw Kit, Press Ring and  
Ring Jaw for use with  
Viega MegaPress fittings



**89<sup>99</sup>**

**H27-711**  
Mfg. #48-11-2440

## Replacement Batteries and Chargers

Compatible with  
Milwaukee® M12™  
and M18™ tools



Order #	Mfg. #	Description	Price
H86-132	2922-20	M18 FORCE LOGIC Press Tool (Bare Tool Only)	<b>2699.99</b>
H86-183	2922-22M	M18™ FORCE LOGIC™ Press Tool w/6 Streamline ACR Jaws (1/4", 3/8", 1/2", 5/8", 3/4" and 7/8")	<b>4499.99</b>

Order #	Mfg. #	Description	Volts	Price
H27-711	48-11-2440	M12 REDLITHIUM™ XC 4.0 Extended Capacity Battery Pack	12	<b>89.99</b>
H28-179	48-11-1850	M18 REDLITHIUM™ XC 5.0 Battery Pack	18	<b>159.99</b>
H27-714	48-59-1812	M12 & M18 Multi-Voltage Charger	12/18	<b>79.99</b>

# CARBON MONOXIDE AWARENESS MONTH

## Best Practices

- Always Carry a CO Monitor to Site
- Check CO Levels Before Leaving Site
- Inform Customers About CO Risks

*Johnstone Has All the Tools  
You Need to Get the Job Done*



**184<sup>99</sup>**

**H28-624**  
Mfg #COA2

## Wireless Carbon Monoxide Detector

Compact CO detector with wireless capabilities for use mobile devices



**174<sup>99</sup>**

**H25-775**  
Mfg #CD100A

## Combustible Gas Leak Detector

50 PPM methane minimum detection level

**269<sup>99</sup>**

**H85-963**  
Mfg. #LDC-4000

## Refrigerant and Combustible Gas Leak Detector

**A2L compatible**

Dual purpose refrigerant and combustible gas leak detector



**49<sup>99</sup>**

**H24-817**  
Mfg. #78060

## Gas Pressure Test Kit

Accurately set manifold pressure for natural or LP gas  
Diaphragm gauge calibrated in inches of W.C.  
Range: 0 to 35" W.C.



**829<sup>99</sup>**

**H93-103**  
Mfg. #G5TWIN

## Refrigerant Recovery Unit

**A2L compatible**

Refrigerant-isolated crankcase for automatic liquid and vapor recovery  
Twin cylinders and condensers provide fast recovery



**314<sup>99</sup>**

**H28-848**  
Mfg. #SR47

## Wireless Refrigerant Scale

Large and durable 13" platform  
Load capacity up to 252 lbs  
Accuracy range  $\pm 0.03\% \text{rdg} + 0.25 \text{ oz}$   
200+ hours battery life  
IP64 weather resistant rating



# DON'T MISS THE FINAL COMPETITION!

**DECEMBER 13, 7PM ET**  
**CBS SPORTS NETWORK**

The top 10 finalists and apprentices from round 2 will battle it out for the title of ServiceTitan HVAC National Champion and their share of over \$100,000 in cash and prizes.

Johnstone is a Proud Sponsor of the 2024 National Championship





# The **NEW** FocusPRO®


**Honeywell** Home

Non-Programmable, Programmable, and Smart Solutions

**N100**

**P200**

**S200**

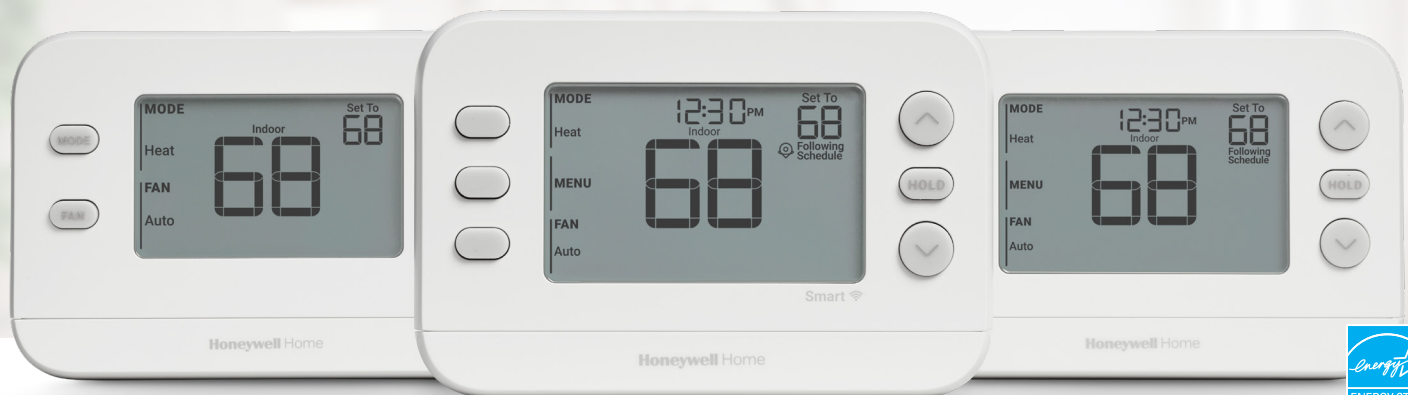

**34<sup>99</sup>**

**L51-909**

Mfg #TH1110U4000/U

**44<sup>99</sup>**

**L51-911**

Mfg #TH2110U4004/U

**84<sup>99</sup>**

**L51-913**

Mfg #TH2110WF4008/U

- Non-Programmable
- Available in 1H/1C and 3H/2C

- Programmable
- Available in 1H/1C and 3H/2C

- Smart
- Available in 1H/1C and 3H/2C
- Wi-Fi Hardwired (C-Wire)
- Control on Mobile Phone
- Energy Star Certified

## All FocusPRO® Thermostats:

- UWP® Mounting System
- Change Filter Reminders
- Eligible for Private Label Program
- Available at all Johnstone Supply Locations

### UWP® Wall Plate



For more information about FocusPro and the Private Label Program, visit **JohnstoneSupply.com/resideo**